



E4 Pro

OUTDOOR DISPLAY SERIES

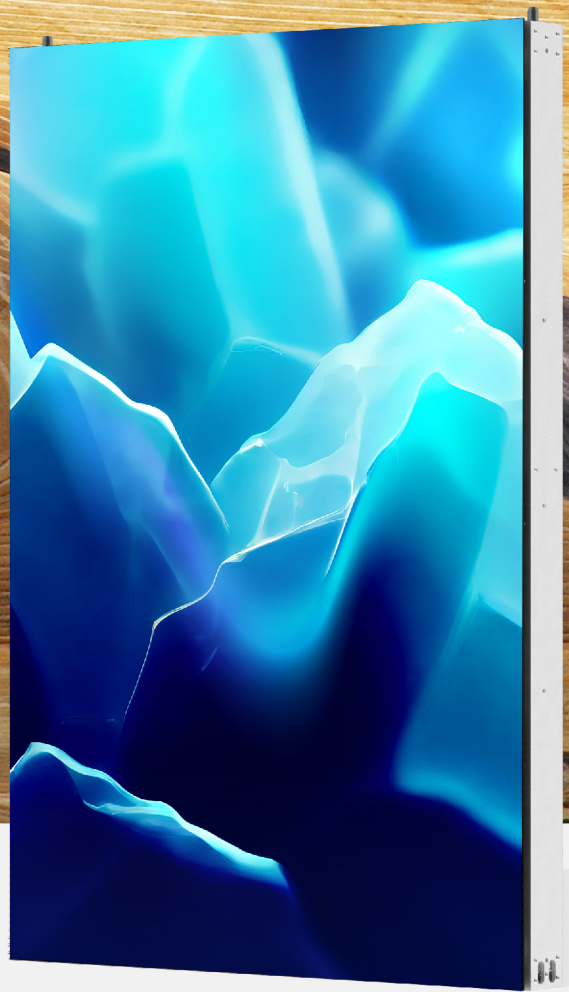

Cabinet

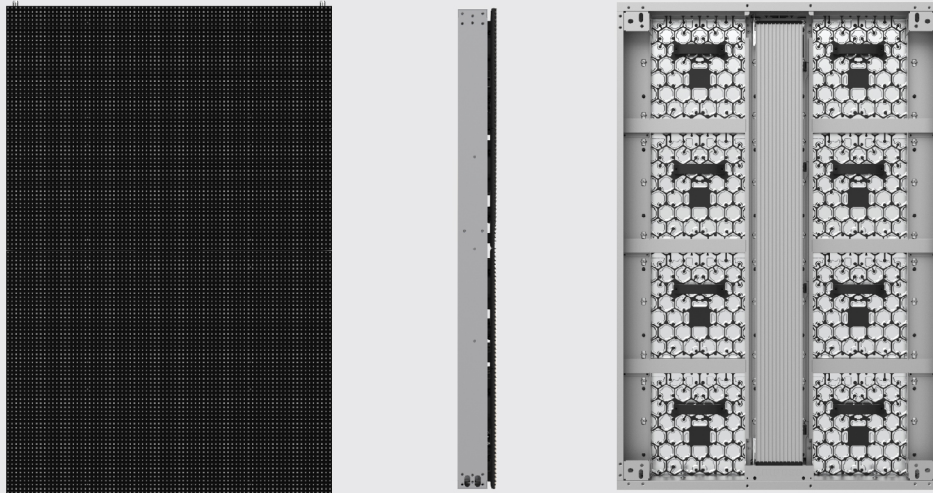

Benefits

- Suitable for Extremely Hot Environment
- Aluminum Back Cover Design for Efficient Heat Dissipation
- 10,000nits Brightness Available
- Curved and Fine Angle Displays Available
- Suitable for 2K/4K/8K Display

Product Features



10,000+ Nits



Energy Saving



UV Resistance




High Refresh Rate



High Contrast Ratio



16:9 Ratio



cooling base plate



Easy Assembly



Block Installation



Front & Rear Service



Light & Thin



Smart Module



Model

E4 Pro Series : E4P-4.76SA | E4P-6.67SA | E4P-8.33SA | E4P-10LA

Specifications

E4 Pro Series


Model	E4P-4.76SA	E4P-6.67SA	E4P-8.33SA	E4P-10SA	E4P-10LA ^③
Pixel Pitch (mm)	4.76	6.67	8.33	10	10
Pixel Configuration	SMD			LOB	
Module Size (mm) (H x W)	300×400				
Module Resolution (pixels) (H x W)	63×84	45×60	36×48	30×40	30×40
Cabinet Size (H x W)	1200×800				900×800
Cabinet Resolution (pixels) (H x W)	252×168	180×120	144×96	120×80	90×80
Driver Voltage ^①	Singal-Voltage	Dual-Voltage	Singal-Voltage	Dual-Voltage /Singal-Voltage ^③	Singal-Voltage
Backshell Material ^①	Aluminum Plastic			Aluminum Plastic /Fiberglass Plastic ^③	Fiberglass Plastic
Brightness (cd/m ²) ^{①②}	7500	10000		10000 / 8000 ^③	6000
Refresh Rate (Hz)	3840				
Grey Level	14 Bit-16 Bit				
Viewing Angle (H/V)	160° / 71°	160° / 75°	160° / 78°	160° / 75°	160° / 75°
Power Consumption Max. (W/m ²) ^②	680			680 / 600 ^③	600
Power Consumption Avg. (W/m ²) ^②	204			204 / 180 ^③	180
IP Rating (Front / Rear)	IP65 / IP54				
Maintenance	Front & Rear				Rear
Weight (kg/m ²)	29				
Working Temperature / Humidity	-30℃~50℃ / 10%-90% RH				
Storage Temperature / Humidity	-40℃~70℃ / 10%-90% RH				

①: Based on different hardware sepcification

②: Theoretical values only. All specifications are subject to the actual product.


③: Sport Perimeter Version Only

Exploded View

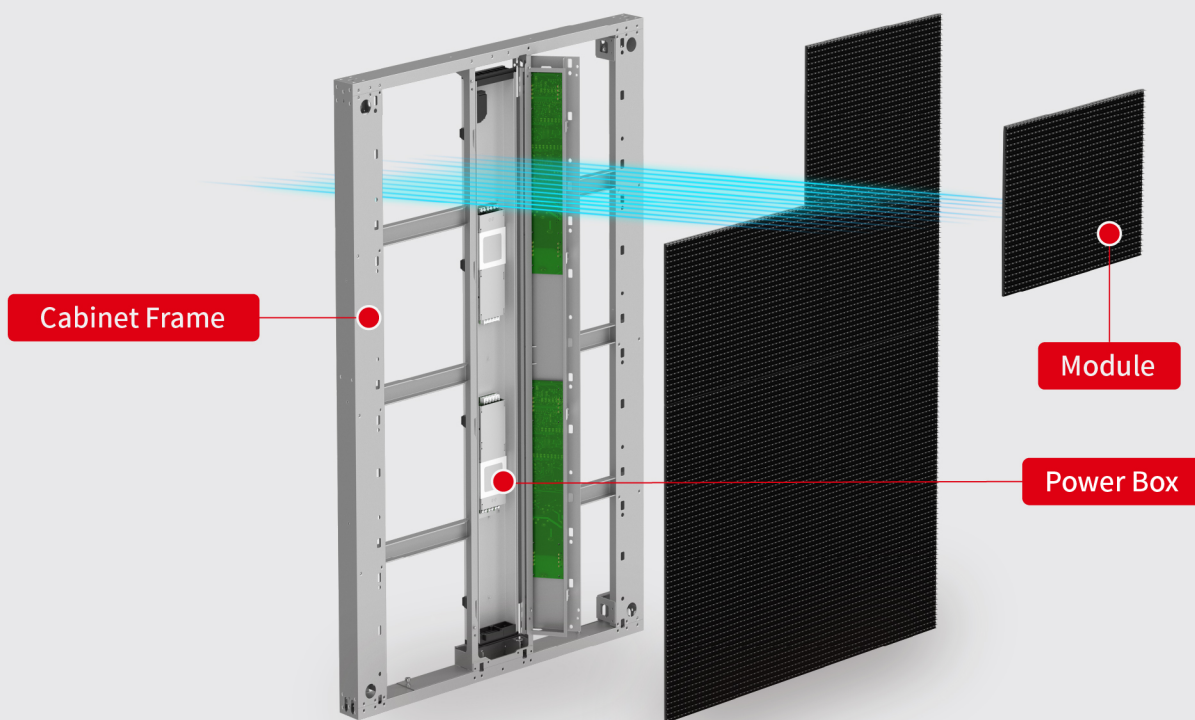



Energy Saving

1. Dual-Voltage technology saves up to 30% power consumption compared with traditional Single-Voltage technology.
2. Efficient power supply.
3. High contrast rate and low brightness support better display effects.

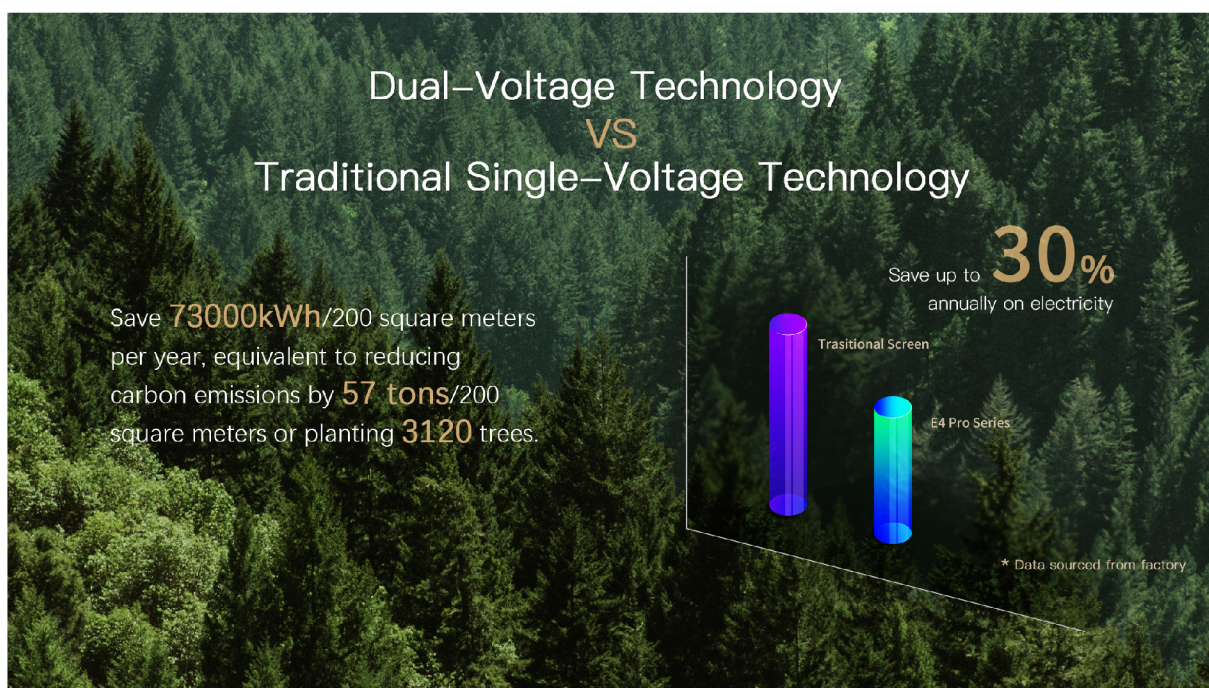

More Excellent Hardware Performance


- It has an advantage in heat dissipation compared with plastic profile module.
- Its weight is 30% lighter than die-casting aluminum profile module.

			
	Plastic Profile Module	Die-casting Aluminum Profile Module	Aluminum-plastic Profile Module
	11.5KG/m ²	15.6KG/m ²	12KG/m ²
Material	PC+Fiberglass	Die-casting Aluminum	Aluminum-plastic
Thermal Conductivity	0.22W/m/K	96.2W/m/K	209W/m/K
Heat Dissipation Effect	★★	★★★★	★★★★★


Entirely Front & Rear Dual Service, Efficient and Fast

Front & Rear service:

Creative and unique double-door structure is convenient to front and rear maintenance.

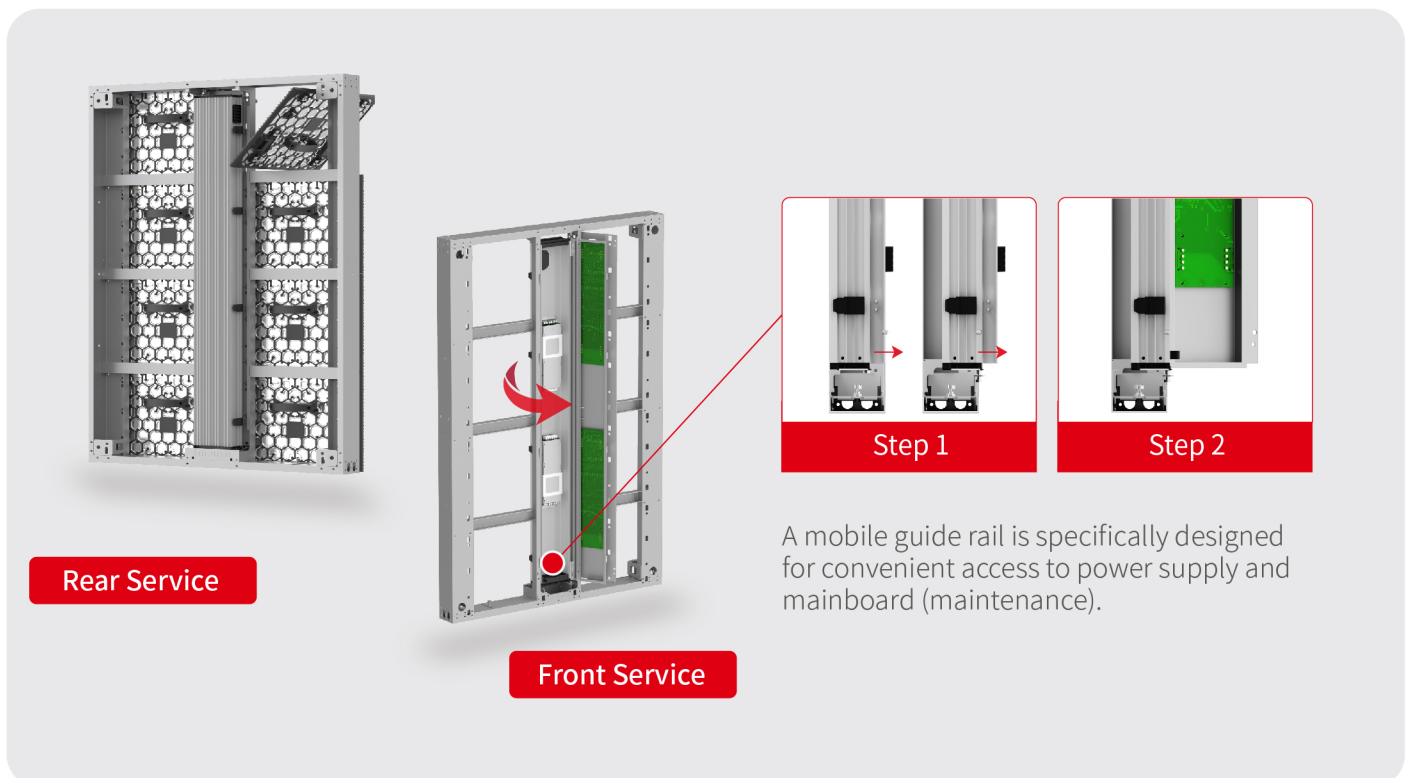


Integrated Power Control Box, Professional Thermodynamic Design

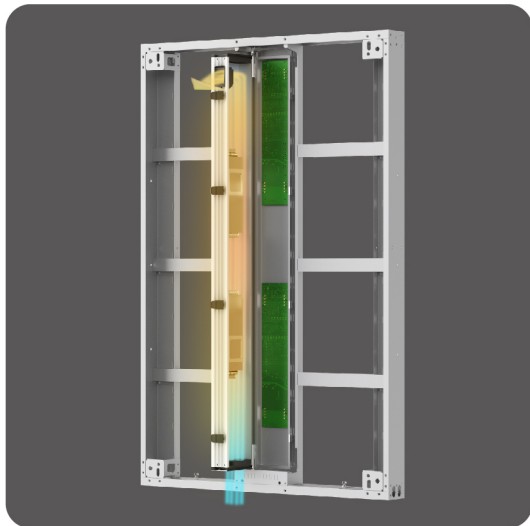


Active cooling with convex rib structure + Passive cooling.

90° Corner and Curved Design Available

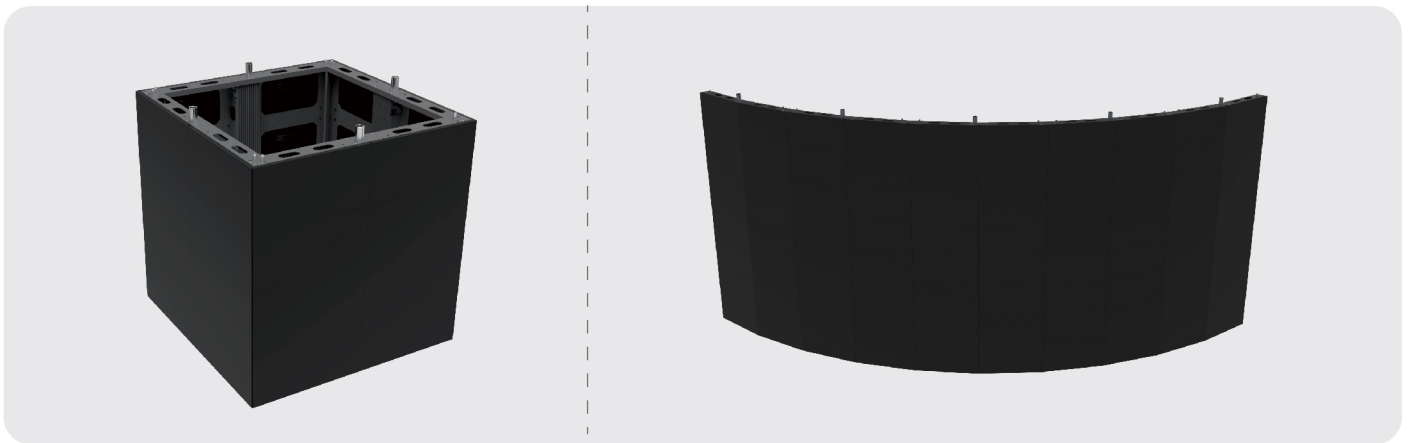

Block Structure Design, Saving Time and Cost on Installation

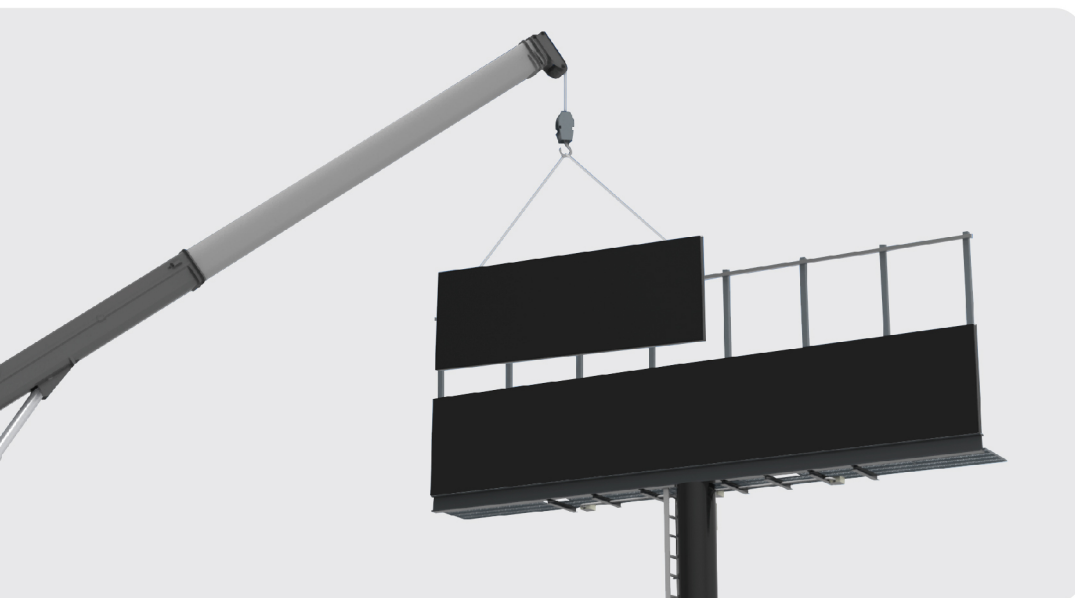

Suitable for the Following Application Scenarios



Naked-3D
Display

Curved Outdoor
Display



Billboard



Beyond What You Can See



CHAINZONE TECHNOLOGY (FOSHAN) CO., LTD.

📍 Chainzone Tech. Industrial Park, Taishan Bei Rd., Sanshan Avenue,
Nanhai District, Foshan, Guangdong, P.R. China 528200

☎ +86-757-86393001

✉ sales@chainzone.com 🌐 www.chainzone.com