

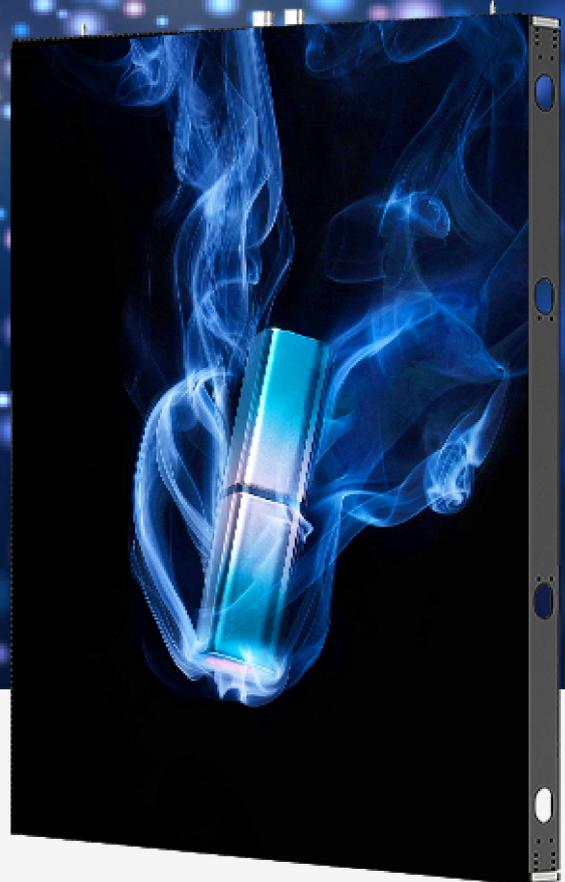


EXL

OUTDOOR DISPLAY

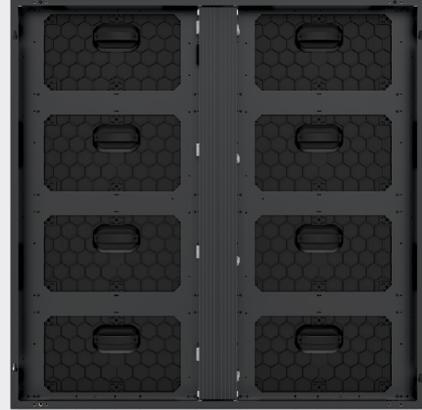

Cabinet

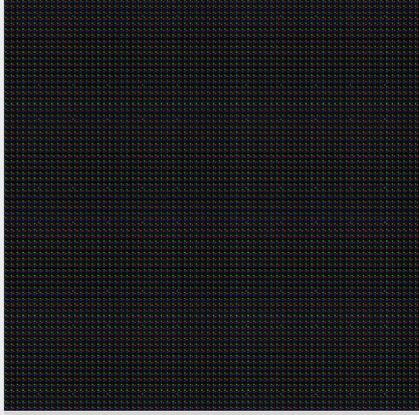

Benefits

- High Precision Aluminum Profile Cabinet.
- High Contrast Ratio.
- Simple Maintenance Design.
- Wide Viewing Angle.
- High Protection Level for Outdoors.

Product Features



Light & Thin



Honeycomb
Back Cover



Patented Mask



High Contrast Ratio



Right-Angle



Rapid Heat Dissipation



High Refresh Rate



Anti-UV



Model

EXL Series : EXL-6.67SB | EXL-8SB | EXL-10SB | EXL-16SB | EXL-6.67SF | EXL-8SF
EXL-10SF | EXL-16SF

Specifications

EXL Series

Model	EXL-6.67SB	EXL-8SB	EXL-10SB	EXL-16SB
Pixel Pitch (mm)	6.67	8	10	16
Pixel Configuration	SMD			
Module Size (mm) (H x W)	320 x 480			
Module Resolution (pixels) (H x W)	48 x 72	40 x 60	32 x 48	20 x 30
Cabinet Size (H x W)	1280 x 960		1280 x 1440	
Cabinet Resolution (pixels) (H x W)	192 x 144	160 x 120	128 x 96	80 x 60
Driver Voltage ①	Singal-Voltage			
Backshell Material ①	Fiberglass Plastic			
Brightness (cd/m ²) ①②	8500			
Refresh Rate (Hz)	3840			
Grey Level	14 Bit-16 Bit			
Viewing Angle (H/V)	160°/77°	160°/87°	160°/ 71°	160°/ 102°
Power Consumption Max. (W/m ²) ②	650			
Power Consumption Avg. (W/m ²) ②	195			
IP Rating (Front / Rear)	IP65		IP65 / IP54	
Maintenance	Rear		Front	
Weight (kg/m ²)	30		31	
Working Temperature / Humidity	-30°C ~50°C / 10%~90% RH			
Storage Temperature / Humidity	-40°C ~70°C / 10%~90% RH			

Model	EXL-6.67SF	EXL-8SF	EXL-10SF	EXL-16SF
Pixel Pitch (mm)	6.67	8	10	16
Pixel Configuration	SMD			
Module Size (mm) (H x W)	320 x 480			
Module Resolution (pixels) (H x W)	48 x 72	40 x 60	32 x 48	20 x 30
Cabinet Size (H x W)	1280 x 960		1280 x 1440	
Cabinet Resolution (pixels) (H x W)	192 x 216	160 x 180	128 x 144	80 x 90
Driver Voltage ①	Singal-Voltage			
Backshell Material ①	Fiberglass Plastic			
Brightness (cd/m ²) ①②	8500			
Refresh Rate (Hz)	3840			
Grey Level	14 Bit-16 Bit			
Viewing Angle (H/V)	160°/77°	160°/87°	160°/ 71°	160°/ 102°
Power Consumption Max. (W/m ²) ②	650			
Power Consumption Avg. (W/m ²) ②	195			
IP Rating (Front / Rear)	IP65		IP65 / IP54	
Maintenance	Rear		Front	
Weight (kg/m ²)	30		31	
Working Temperature / Humidity	-30°C ~50°C / 10%~90% RH			
Storage Temperature / Humidity	-40°C ~70°C / 10%~90% RH			

①: Based on different hardware sepcification

②: Theoretical values only. All specifications are subject to the actual product.

③: Sport Perimeter Version Only

Suitable for the Following Application Scenarios



CHAINZONE

Beyond What You Can See



CHAINZONE TECHNOLOGY (FOSHAN) CO., LTD.

📍 Chainzone Tech. Industrial Park, Taishan Bei Rd., Sanshan Avenue,
Nanhai District, Foshan, Guangdong, P.R. China 528200

☎ +86-757-86393001

✉ sales@chainzone.com 🌐 www.chainzone.com